





## RELATIONSHIP OF OCV AND STATE OF CHARGE (20C)

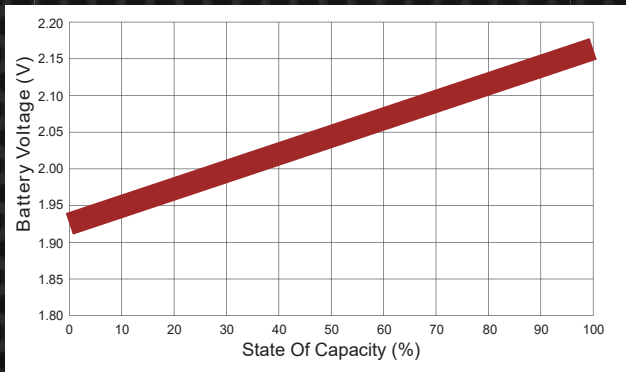

## CYCLE LIFE IN RELATION TO DEPTH OF DISCHARGE

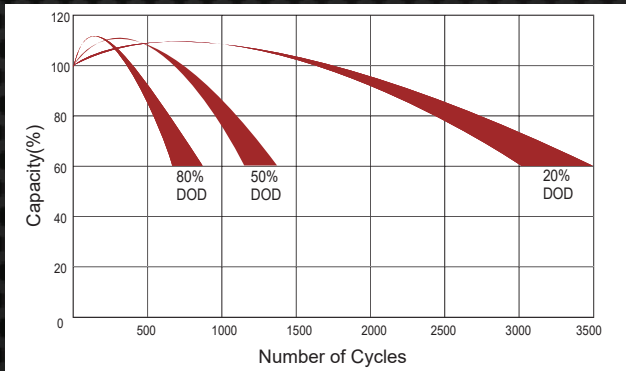


## SPECIFICATIONS

Cells Per Unit	3
Voltage Per Unit	6
Capacity	400Ah @ 20hr- rate to 1.75V per cell @ 25°C
Weight	Approx. 57.0 Kg (Tolerance ± 1.5%)
Internal Resistance	Approx. 1.1 m Ω
Terminal	F22(M8) / F14(M8)
Max. Discharge Current	4000A (5 sec)
Cold Cranking Ampere(CCA)	800 A
Maximum Charging Current	120 A
Reference Capacity	C3 306.6AH C5 351.5AH C10 380.0AH C20 400.0AH
Float Charging Voltage	6.80 V~6.90 V @ 25°C Temperature Compensation: -3mV/ °C/ Cell
Cycle Use Voltage	7.30 V~7.40 V @ 25°C Temperature Compensation: -4mV/ °C / Cell
Operating Temperature Range	Discharge: -20 °C ~ 60 °C Charge: 0 °C ~ 50 °C Storage: -20 °C ~ 60 °C
Normal Operating Temperature Range	25 °C ± 5°C
Self Discharge	Batteries can be stored for up to 6 months at 25°C and then recharging is recommended. Monthly Self-discharge ratio is less than 3% at 25°C. Please charged batteries before using.
Container Material	A.B.S. UL94-HB, UL94-V0 Optional.

## DIMENSIONS

Length	295±2mm (11.6 inches)
Width	178±2mm (7.01 inches)
Height	404±2mm (15.9 inches)
Total Height	423±2mm (16.7 inches)
Terminal	Value
M5	6~7 N*m
M6	8~10 N*m
M8	10~12 N*m

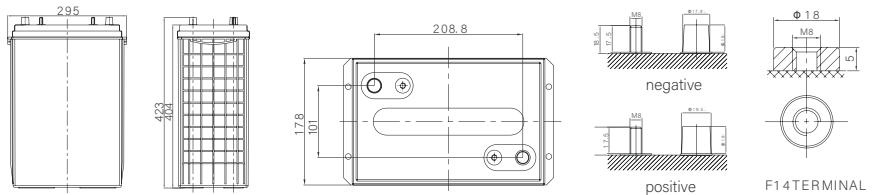

## CONSTANT CURRENT DISCHARGE CHARACTERISTICS: A (25°C)

F. V./Time	30MIN	1HR	2HR	3HR	4HR	5HR	8HR	10HR	20HR
1.60V	376.8	227.6	139.0	109.2	86.8	74.2	49.2	40.8	20.8
1.65V	368.9	223.3	136.7	107.5	85.6	73.3	48.6	40.4	20.6
1.70V	358.4	217.6	133.5	105.3	84.0	72.0	47.9	39.8	20.3
1.75V	344.2	209.8	129.3	102.2	81.8	70.3	46.9	39.1	20.0
1.80V	324.7	199.1	123.3	98.0	78.8	68.0	45.5	38.0	19.5
1.85V	297.1	183.9	114.8	91.9	74.4	64.6	43.4	36.5	18.8

## CONSTANT POWER DISCHARGE CHARACTERISTICS : WPC (25°C)

F. V./Time	30MIN	1HR	2HR	3HR	4HR	5HR	8HR	10HR	20HR
1.60V	684	426	264	209	167	143	96.0	80.2	40.9
1.65V	680	422	261	207	165	142	95.2	79.5	40.6
1.70V	664	413	256	203	162	140	93.9	78.5	40.2
1.75V	645	400	249	198	159	137	92.1	77.1	39.5
1.80V	614	381	238	190	154	133	89.5	75.1	38.6
1.85V	568	355	223	179	145	127	85.7	72.2	37.3

## CERTIFICATIONS



paragonenergy.ca  
goinggreen paragonenergy.ca

**CAUTION: READ SAFETY AND INSTALLATION INSTRUCTIONS BEFORE USING THE PRODUCT.**  
All rights reserved. Specifications included in this datasheet are subject to change without notice.